


NOTES:

1. THIS DRAWING DESCRIBES THE FUELAB 628xx QSST SERIES.
2. FEATURES INCLUDE:
 - QSST SERVICE SURGE TANK FOR FAST PUMP SERVICE
 - FITS STANDARD 24 BOLT FILL PLATE BOLT PATTERN
 - ROLLOVER FLAP PROTECTION
 - BRUSHED OR BUSHLESS PUMP OPTION
 - FUEL TANK VENT w/ ROLLOVER PROTECTION
 - GASKETS & HARDWARE INCLUDED
 - STOCK w/ EMPTY FILL NECK HOLE
 - OPTIONAL: REMOTE FUEL FILL
FUEL LEVEL SENSOR
FUEL CELL VENT KIT
3. FUEL COMPATIBILITY INCLUDES:
 - GASOLINE (PUMP OR RACE)
 - METHANOL
 - ETHANOL (INCLUDING E85)
4. UNIQUE SERIAL NUMBER IS ASSOCIATED ONLY WITH PUMP DROP-INS BUT NO OTHER ACCESSORIES.
5. 62811-7 IS NOT AVAILABLE; 494XX LIFT PUMP DOES NOT SUPPORT A 1100 LPH PUMP.
6. REFERENCE DRAWING 1550202A01/02/03 FOR BOM AND ASSEMBLY NOTES.

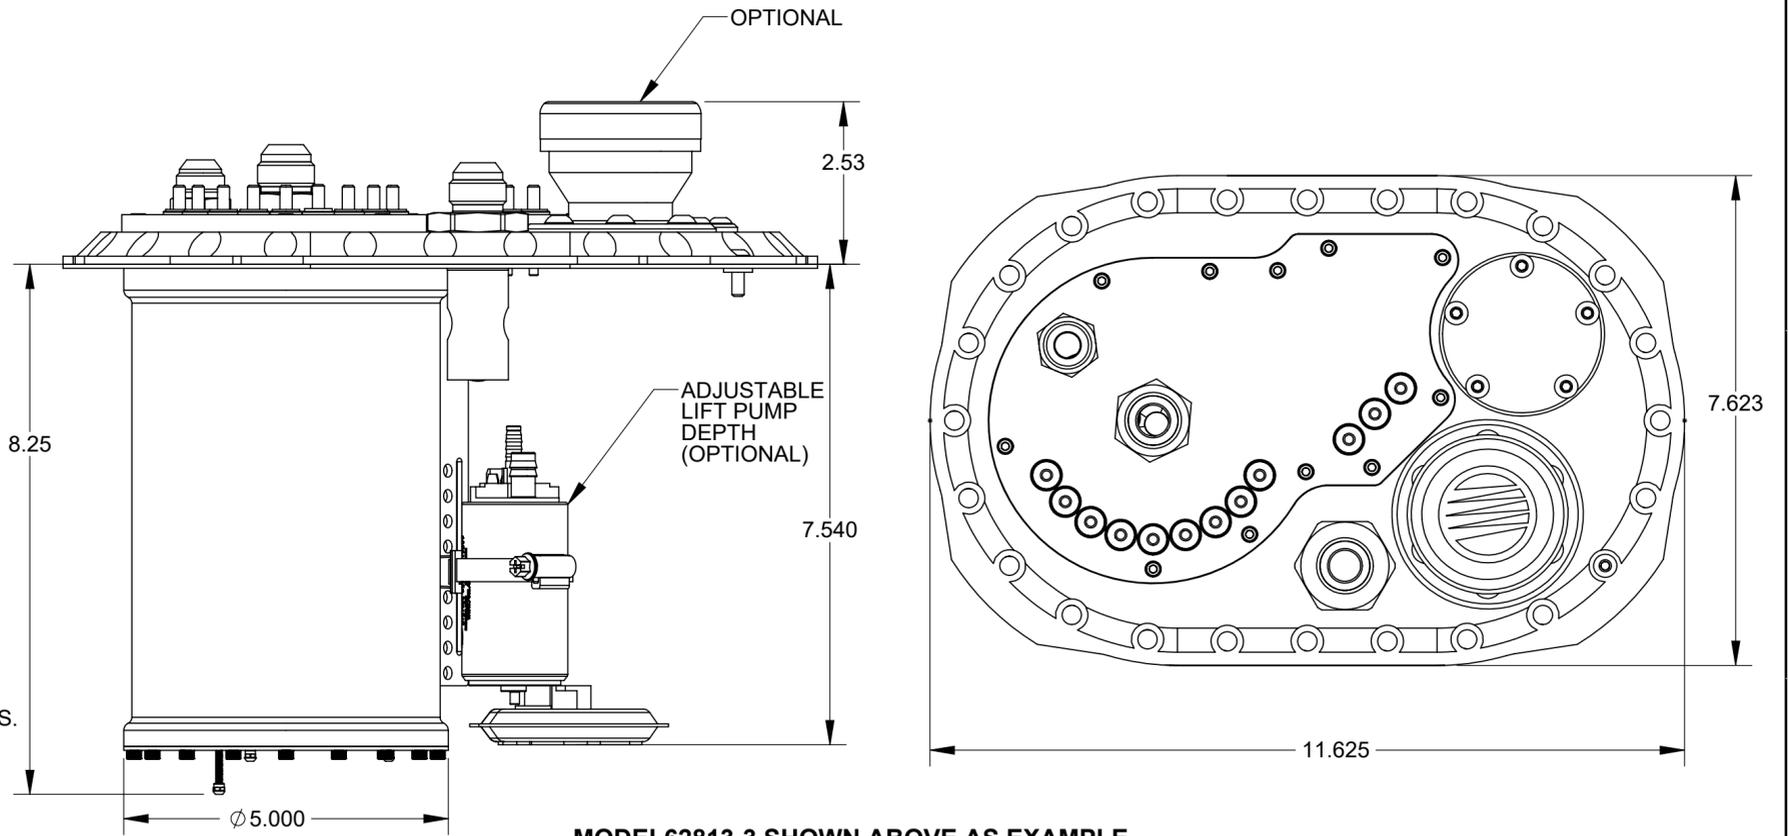


MODEL62813-3 SHOWN ABOVE AS EXAMPLE


SEE TABLES BELOW FOR DETERMINATION OF DESIRED MODEL NUMBER.

MODEL NUMBER SCHEME:

HAVING SAME INLET AND OUTLET FITTING SIZES:

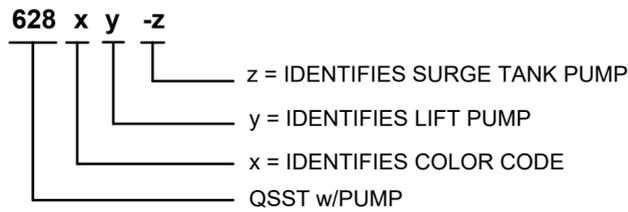

ADDING DIFFERENT ACCESSORIES

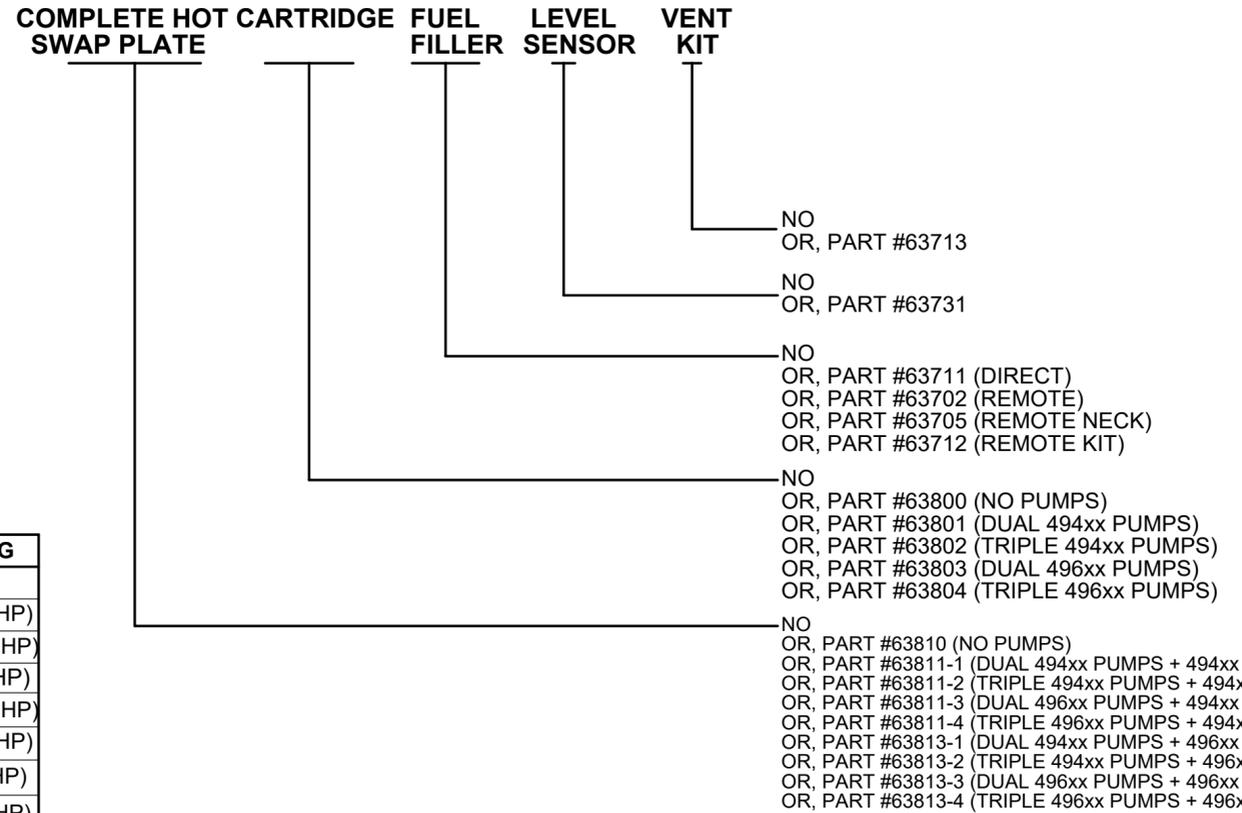

COLOR CODE, x

x	BODY COLOR
1	TITANIUM
2	GOLD

LIFT PUMP, y

y	PART #
0	NO LIFT PUMP
1	494xx 340 LPH PUMP
3	496xx 500 LPH PUMP

SURGE TANK PUMP, z

z	PART #	FLOW RATING
0	NO PUMP	NONE
1	DUAL494	340 LPH (1500 HP)
2	TRIPLE 494	1020 LPH (2250 HP)
3	DUAL 496	1100 LPH (2600 HP)
4	TRIPLE 496	1500 LPH (3900 HP)
5	20813 H/E	550 LPH (1300 HP)
6	20814 H/E	625 LPH (1600 HP)
7	20815 H/E	11000 LPH (2600 HP)

UNLESS OTHERWISE SPECIFIED:
 INTERPRET DWG PER ANSI Y14.5
 DIMENSIONS ARE IN INCHES
 TOLERANCES:
 FRACTIONAL: ± 1/64"
 ANGULAR: ± 1/2°
 DECIMALS:
 X-1 .XX ± .03 .XXX ± .010
 SURFACE FINISH 128 ✓ OR BETTER
 BREAK ALL SHARP EDGES .010 MAX
 REMOVE ALL BURRS

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

FUELAB
 DIGITAL FUEL DELIVERY Pontoon Beach, Illinois

TITLE:
**QSST V2,
 628xx SERIES**

SIZE	DWG. NO.	REV
C	155020200	A

SCALE: WEIGHT: LB SHEET: 1 OF 1